

Take advantage of technology that scales and flexes as your business needs do. Be more productive and efficient with the IM C2000(A)/C2500(A) range of A3 colour devices.

Take advantage of:

- Print speeds of 20 25 ppm
- Easy-to-use 10.1" Smart Operation Panel with intuitive menu.
- Mobile connectivity options including NFC, AirPrint* or Mopria
- Increased uptime and performance with RICOH
 Intelligent Support

Access a range of productivity features and upgrades -such as scanning directly to your email or dedicated folders on your network and ensure you have the latest security enhancements and mobile device connectivity options. Our intelligent devices are designed to do more as and when your business needs to, using technology that's scalable, secure, sustainable and simple.

Get more from your intelligent device:

- Tailor settings to individual users for quick access to apps used most often
- Scan smaller documents with the small size paper scan unit.
- Work more efficiently with expanded paper tray capacity
- Automatic firmware upgrades providing maximum security


Ricoh's Intelligent devices remain current and relevant no matter what your workplace requires. This way, you have ready and easy access to new functionality, when needed. Environmentally-friendly low TEC (Typical Electricity Consumption) values, deliver reduced energy consumption and cut running costs. While RICOH Intelligent Support features such as Predictive Maintenance mean that device performance is monitored and any fixes resolved swiftly, minimising impact on your workplace,

Ready to take a swipe at a faster way to work? Our range of intelligent devices come fitted with a 10.1" Smart Operation Panel designed to enhance your productivity, mobility and environmental commitment. Experience a user interface that offers fast and simple navigation with the ability to customise the layout to best suit your needs - even by adding your own company branding. Access device features, move between jobs and tasks quickly and conveniently enabling teams to work smarter.

All intelligent devices provide:

- Quick access to Web Help Tools via RICOH Intelligent
 Support
- Consistent user interface and experience across your
 Ricoh fleet
- Easy integration with third party solutions
- Regular functionality upgrade releases to do more, smarter and faster

IM C2000(A) / IM C2500(A) hardware configuration

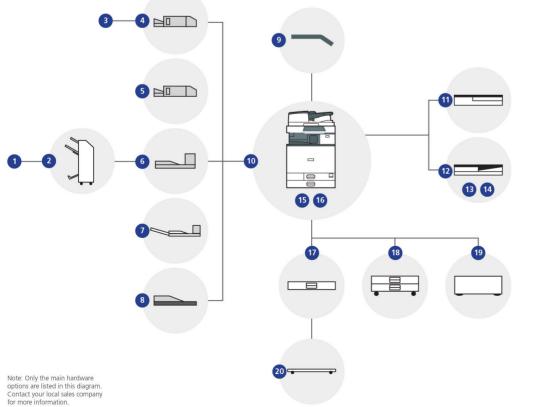

Punch unit NA/EU/SC PU3080 1,000-sheet booklet finisher SR3270 Punch unit NA/EU/SC PU3070 500-sheet internal finisher SR3250 250-sheet staple-free internal finisher SR3300 Bridge unit BU3090 Side tray Type M37 Internal shift sort tray SH3080 1-bin tray BN3130 IM C2000(A) and IM C2500(A) 11 ARDF (IM C2000 / IM C2500) 12 SPDF (IM C2000(A) / IM C2500(A)) 3 Small paper feeding unit Type M37 14 Double Sided Detection Unit Type M37 15 Fax Type M37 16 Banner paper guide tray Type M19 17 550-sheet paper bank PB3270 18 2 x 550-sheet paper bank PB3300 Low Cabinet 54 20 Caster table 39

RICOH IM C2000A/IM C2000/IM C2500A/IM C2500

Main specifications

GENERAL	IM C2000A	IM C2000	IM C2500A	IM C2500
Varm-up time		21	1 seconds	
First output speed: B/W			1 seconds	
First output speed: full colour			4 seconds	
	00			05
Continuous output speed	20 ppm	20 ppm	25 ppm	25 ppm
Memory: standard			2 GB	
Memory: maximum			4 GB	
HDD: standard			320 GB	
HDD: maximum			320 GB	
ARDF capacity		10	00 sheets	
SPDF capacity		22	20 sheets	
Weight	96.4 kg	91 kg	96.4 kg	91 kg
Dimensions: W x D x H Power source	587 x 685 x 963 mm	587 x 685 x 913 mm 220 - 2	587 x 685 x 963 mm 40 V, 50/60 Hz	587 x 685 x 913 mm
COPIER				
Multiple copying	Up to 999 copies			
Resolution	600 dpi			
Zoom	From 25% to 400% in 1% steps			
PRINTER	·			
CPU	Applied also E2020 1 2 CHz			
	ApolloLake E3930 1.3 GHz	otion) DDE direct (const-4	\	
Printer language: standard	PCL5c, PCL6, PostScript 3 (emula	, ,	,	
Printer language: option	Genuine Adobe ®PostScript®3™	, PictBridge, PDF Direct from	1 Adobe®	
Print resolution: maximum	1,200 x 1,200 dpi			
Network interface: standard	Ethernet 10 base-T/100 base-TX/	1000 base-T, USB Host I/F 1	Type A, USB Device I/F Type B	
Network interface: option	Bi-directional IEEE 1284/ECP, Wil	reless LAN (IEEE 802.11a/b.	/g/n), Additional NIC (2nd port)	
Mobile printing capability	Apple AirPrint™, Mopria, Google 0	Cloud Print, NFC, Ricoh Sma	art Device Connector	
Windows® environments	Windows® 7, Windows® 8.1, Win Windows® Server 2016	dows® 10, Windows® Serve	er 2008, Windows® Server 2008R2	, Windows® Server 2012R2,
Mac OS environments	Macintosh OS X Native v10.11 or	later		
UNIX environments	UNIX Sun® Solaris, HP-UX, SCO	OpenServer, RedHat® Linu	x Enterprise, IBM® AIX	
SAP® environments	SAP® S/4®			
Other supported environments	IBM iSeries			
SCANNER				
Scanning speed: ARDF	80 ipm (200/300 dpi)			
Scanning speed: SPDF	120 ipm (simplex)/240 ipm (duplex	()		
Resolution: maximum	1,200 dpi			
Compression method	TIFF (MH, MR, MMR, JBIG2), Gra	ayscale		
File formats		•	ression PDF, Single page PDF/A, M	lulti page TIFF. Multi page PD
	Multi page High compression PDF		received and an arranged page of a constant	in page in it, in a page i a
Scan modes	E-mail, Folder, USB, SD Card			
	E-mail, Folder, USB, SD Card			
FAX	E-mail, Folder, USB, SD Card		STN, PBX	
FAX Circuit	E-mail, Folder, USB, SD Card	Pé	STN, PBX seconds	
FAX Circuit Transmission speed	E-mail, Folder, USB, SD Card	P\$ 2	seconds	
FAX Circuit Transmission speed Modem speed: maximum Resolution: standard	E-mail, Folder, USB, SD Card	P\$ 2 3	seconds 3.6 Kbps	
FAX Circuit Transmission speed Modem speed: maximum Resolution: standard	E-mail, Folder, USB, SD Card	P\$ 2 3 8x3.85 line	seconds 3.6 Kbps /mm, 200x100 dpi	
FAX Circuit Transmission speed Modem speed: maximum Resolution: standard Resolution: option	E-mail, Folder, USB, SD Card	PS 2 3 8x3.85 line 16x15.4 line	seconds 3.6 Kbps v/mm, 200x100 dpi e/mm, 400x400 dpi	
FAX Circuit Transmission speed Modem speed: maximum Resolution: standard Resolution: option Compression method		PS 2 3 8x3.85 line 16x15.4 lini MH, M	seconds 3.6 Kbps ½mm, 200x100 dpi ½mm, 400x400 dpi R, MMR, JBIG	
FAX Circuit Transmission speed Modem speed: maximum Resolution: standard Resolution: option Compression method Scanning speed	E-mail, Folder, USB, SD Card	PS 2 3 8x3.85 line 16x15.4 lin MH, M 68 spm	seconds 3.6 Kbps /mm, 200x100 dpi e/mm, 400x400 dpi R, MMR, JBIG 81 spm	68 spm
Circuit Transmission speed Modern speed: maximum Resolution: standard Resolution: option Compression method Scanning speed Memory: standard		PS 2 3 8x3.85 line 16x15.4 lin MH, M 68 spm 4 MB	seconds 3.6 Kbps /mm, 200x100 dpi e/mm, 400x400 dpi R, MMR, JBIG 81 spm , (320 pages)	68 spm
FAX Circuit Transmission speed Modem speed: maximum Resolution: standard Resolution: option Compression method Scanning speed Memory: standard Memory: maximum		PS 2 3 8x3.85 line 16x15.4 lin MH, M 68 spm 4 MB	seconds 3.6 Kbps /mm, 200x100 dpi e/mm, 400x400 dpi R, MMR, JBIG 81 spm	68 spm
FAX Circuit Transmission speed		PS 2 3 8x3.85 line 16x15.4 lin MH, M 68 spm 4 MB	seconds 3.6 Kbps /mm, 200x100 dpi e/mm, 400x400 dpi R, MMR, JBIG 81 spm , (320 pages)	68 spm
Circuit Transmission speed Modem speed: maximum Resolution: standard Resolution: option Compression method Scanning speed Memory: standard Memory: maximum PAPER HANDLING	81 spm Standard paper tray(s):SRA3, A3,	PS 2 3 8x3.85 line 16x15.4 line MH, M 68 spm 4 MB 60 MB,	seconds 3.6 Kbps /mm, 200x100 dpi e/mm, 400x400 dpi R, MMR, JBIG 81 spm , (320 pages) , (4,800 pages)	68 spm
FAX Circuit Transmission speed Modern speed: maximum Resolution: standard Resolution: option Compression method Scanning speed Memory: standard Memory: maximum PAPER HANDLING	81 spm	PS 2 3 8x3.85 line 16x15.4 line MH, M 68 spm 4 MB 60 MB, 60 MB,	seconds 3.6 Kbps /mm, 200x100 dpi /mm, 400x400 dpi R, MMR, JBIG 81 spm , (320 pages) , (4,800 pages)	68 spm
FAX Circuit Transmission speed Modem speed: maximum Resolution: standard Resolution: option Compression method Scanning speed Memory: standard Memory: maximum PAPER HANDLING Recommended paper size	81 spm Standard paper tray(s):SRA3, A3, Optional paper tray(s):SRA3, A3, Bypass tray:SRA3, A3, A4, A5, A6	PS 2 3 8x3.85 line 16x15.4 line MH, M 68 spm 4 MB 60 MB, 60 MB,	seconds 3.6 Kbps /mm, 200x100 dpi /mm, 400x400 dpi R, MMR, JBIG 81 spm , (320 pages) , (4,800 pages)	68 spm
FAX Circuit Transmission speed Modem speed: maximum Resolution: standard Resolution: option Compression method Scanning speed Memory: standard Wemory: maximum PAPER HANDLING Recommended paper size	81 spm Standard paper tray(s):SRA3, A3, Optional paper tray(s):SRA3, A3, Bypass tray:SRA3, A3, A4, A5, A6 1,200 sheets	PS 2 3 8x3.85 line 16x15.4 line MH, M 68 spm 4 MB 60 MB, 60 MB,	seconds 3.6 Kbps /mm, 200x100 dpi /mm, 400x400 dpi R, MMR, JBIG 81 spm , (320 pages) , (4,800 pages)	68 spm
Circuit Fransmission speed Modem speed: maximum Resolution: standard Resolution: option Compression method Scanning speed Memory: standard Memory: maximum PAPER HANDLING Recommended paper size Paper input: standard Paper input: maximum	81 spm Standard paper tray(s):SRA3, A3, Optional paper tray(s):SRA3, A3, Bypass tray:SRA3, A3, A4, A5, A6 1,200 sheets 2,300 sheets	PS 2 3 8x3.85 line 16x15.4 line MH, M 68 spm 4 MB 60 MB, 60 MB,	seconds 3.6 Kbps /mm, 200x100 dpi /mm, 400x400 dpi R, MMR, JBIG 81 spm , (320 pages) , (4,800 pages)	68 spm
Circuit Fransmission speed Modem speed: maximum Resolution: standard Resolution: option Compression method Scanning speed Memory: standard Memory: maximum PAPER HANDLING Recommended paper size Paper input: standard Paper input: standard Paper output: standard	81 spm Standard paper tray(s):SRA3, A3, Optional paper tray(s):SRA3, A3, Bypass tray:SRA3, A3, A4, A5, A6 1,200 sheets 2,300 sheets 500 sheets	PS 2 3 8x3.85 line 16x15.4 line MH, M 68 spm 4 MB 60 MB, 60 MB,	seconds 3.6 Kbps /mm, 200x100 dpi /mm, 400x400 dpi R, MMR, JBIG 81 spm , (320 pages) , (4,800 pages)	68 spm
Circuit Fransmission speed Modem speed: maximum Resolution: standard Resolution: option Compression method Scanning speed Memory: standard Memory: maximum PAPER HANDLING Recommended paper size Paper input: standard Paper input: maximum Paper output: standard Paper output: standard Paper output: standard	81 spm Standard paper tray(s):SRA3, A3, Optional paper tray(s):SRA3, A3, Bypass tray:SRA3, A3, A4, A5, A6 1,200 sheets 2,300 sheets 500 sheets 1,625 sheets	PS 2 3 8x3.85 line 16x15.4 line MH, M 68 spm 4 MB 60 MB, 60 MB, A4, A5, A6, B4, B5, B6, Enve A4, A5, A6, B4, B5, B6, Enve b, B4, B5, B6, Envelopes, Cu	seconds 3.6 Kbps y/mm, 200x100 dpi e/mm, 400x400 dpi R, MMR, JBIG 81 spm (320 pages) (4,800 pages)	68 spm
FAX Circuit Transmission speed Modem speed: maximum Resolution: standard Resolution: option Compression method Scanning speed Memory: standard Memory: maximum PAPER HANDLING Recommended paper size Paper input: standard Paper input: standard Paper output: standard Paper output: maximum	81 spm Standard paper tray(s):SRA3, A3, Optional paper tray(s):SRA3, A3, Bypass tray:SRA3, A3, A4, A5, A6 1,200 sheets 2,300 sheets 500 sheets 1,625 sheets Trays: (60 - 300 g/m²), Bypass: (52	PS 2 3 8x3.85 line 16x15.4 line MH, M 68 spm 4 MB 60 MB, 60 MB, A4, A5, A6, B4, B5, B6, Enve A4, A5, A6, B4, B5, B6, Enve S, B4, B5, B6, Envelopes, Cu	seconds 3.6 Kbps /mm, 200x100 dpi /e/mm, 400x400 dpi R, MMR, JBIG 81 spm (320 pages) (4,800 pages) /elopes elopes elopes sistom Size paper	
Circuit Circuit Cransmission speed Modem speed: maximum Resolution: standard Resolution: option Compression method Scanning speed Memory: standard Memory: maximum PAPER HANDLING Recommended paper size Paper input: standard Paper input: standard Paper output: standard Paper output: standard Paper output: maximum Paper output: maximum Paper output: maximum Paper weight	81 spm Standard paper tray(s):SRA3, A3, Optional paper tray(s):SRA3, A3, Bypass tray:SRA3, A3, A4, A5, A6 1,200 sheets 2,300 sheets 500 sheets 1,625 sheets Trays: (60 - 300 g/m²), Bypass: (52	PS 2 3 8x3.85 line 16x15.4 line MH, M 68 spm 4 MB 60 MB, 4 MB 60 MB, A4, A5, A6, B4, B5, B6, Envelopes, Cu 2 - 300 g/m²), Duplex: (52 - 1 al paper, Color paper, Letter	seconds 3.6 Kbps y/mm, 200x100 dpi e/mm, 400x400 dpi R, MMR, JBIG 81 spm (320 pages) (4,800 pages)	
Circuit Cransmission speed Modem speed: maximum Resolution: standard Resolution: option Compression method Scanning speed Memory: standard Memory: maximum PAPER HANDLING Recommended paper size Paper input: standard Paper input: standard Paper output: standard Paper output: maximum Paper output: maximum Paper output: maximum Paper output: maximum Paper weight Paper types	81 spm Standard paper tray(s):SRA3, A3, Optional paper tray(s):SRA3, A3, Bypass tray:SRA3, A3, A4, A5, A6 1,200 sheets 2,300 sheets 1,625 sheets Trays: (60 - 300 g/m²), Bypass: (52 Plain paper, Recycle paper, Speci	PS 2 3 8x3.85 line 16x15.4 line MH, M 68 spm 4 MB 60 MB, 4 MB 60 MB, A4, A5, A6, B4, B5, B6, Envelopes, Cu 2 - 300 g/m²), Duplex: (52 - 1 al paper, Color paper, Letter	seconds 3.6 Kbps /mm, 200x100 dpi /e/mm, 400x400 dpi R, MMR, JBIG 81 spm (320 pages) (4,800 pages) /elopes elopes elopes sistom Size paper	
Circuit Transmission speed Modem speed: maximum Resolution: standard Resolution: option Compression method Scanning speed Memory: standard Wemory: maximum PAPER HANDLING Recommended paper size Paper input: standard Paper utput: standard Paper output: maximum Paper output: maximum Paper weight Paper types ECOLOGY	81 spm Standard paper tray(s):SRA3, A3, Optional paper tray(s):SRA3, A3, Bypass tray:SRA3, A3, A4, A5, A6 1,200 sheets 2,300 sheets 1,625 sheets Trays: (60 - 300 g/m²), Bypass: (52 Plain paper, Recycle paper, Speci	PS 2 3 8x3.85 line 16x15.4 line MH, M 68 spm 4 MB 60 MB, 4 MB 60 MB, A4, A5, A6, B4, B5, B6, Envelopes, Cu 4, A5, A6, B4, B5, B6, Envelopes, Cu 2 - 300 g/m²), Duplex: (52 - 1 al paper, Color paper, Letter er, OHP	seconds 3.6 Kbps ymm, 200x100 dpi ymm, 400x400 dpi R, MMR, JBIG 81 spm , (320 pages) , (4,800 pages) yelopes elopes sistom Size paper	
Circuit Transmission speed Modem speed: maximum Resolution: standard Resolution: option Compression method Scanning speed Memory: standard Wemory: maximum PAPER HANDLING Recommended paper size Paper input: standard Paper input: maximum Paper weight Paper vutput: standard Paper vutput: standard Paper vutput: maximum Paper weight Paper types ECOLOGY Power consumption: max.	81 spm Standard paper tray(s):SRA3, A3, Optional paper tray(s):SRA3, A3, Bypass tray:SRA3, A3, A4, A5, A6 1,200 sheets 2,300 sheets 1,625 sheets Trays: (60 - 300 g/m²), Bypass: (52 Plain paper, Recycle paper, Speci	PS 2 3 8x3.85 line 16x15.4 line MH, M 68 spm 4 MB 60 MB, 4 MB 60 MB, A4, A5, A6, B4, B5, B6, Envelopes, Cu 4, A5, A6, B4, B5, B6, Envelopes, Cu 2 - 300 g/m²), Duplex: (52 - 1 al paper, Color paper, Letter er, OHP	seconds 3.6 Kbps /mm, 200x100 dpi /e/mm, 400x400 dpi R, MMR, JBIG 81 spm (320 pages) (4,800 pages) /elopes elopes elopes sistom Size paper	
FAX Circuit Transmission speed Modem speed: maximum Resolution: standard Resolution: option Compression method Scanning speed Memory: standard Memory: maximum PAPER HANDLING Recommended paper size Paper input: standard Paper input: standard Paper output: standard Paper output: standard Paper output: maximum Paper veight Paper types ECOLOGY Power consumption: max. Power consumption operation:	Standard paper tray(s):SRA3, A3, Optional paper tray(s):SRA3, A3, Bypass tray:SRA3, A3, A4, A5, A6 1,200 sheets 2,300 sheets 500 sheets 1,625 sheets Trays: (60 - 300 g/m²), Bypass: (5) Plain paper, Recycle paper, Speci Envelope, Gloss paper, Label pap	PS 2 3 8x3.85 line 16x15.4 line MH, M 68 spm 4 MB 60 MB, 4 MB 60 MB, A4, A5, A6, B4, B5, B6, Envelopes, Cu 2 - 300 g/m²), Duplex: (52 - 1 al paper, Color paper, Letter er, OHP Less:	seconds 3.6 Kbps ymm, 200x100 dpi e/mm, 400x400 dpi R, MMR, JBIG 81 spm , (320 pages) , (4,800 pages) relopes elopes sustom Size paper 169 g/m²) head, Cardstock, Preprinted paper,	Bond paper, Coated paper,
FAX Circuit Transmission speed Modem speed: maximum Resolution: standard Resolution: option Compression method Scanning speed Memory: standard Memory: maximum PAPER HANDLING Recommended paper size Paper input: standard Paper input: maximum Paper output: maximum Paper output: maximum Paper weight Paper types ECOLOGY Power consumption: max. Power consumption operation: BW	Standard paper tray(s):SRA3, A3, Optional paper tray(s):SRA3, A3, Bypass tray:SRA3, A3, A4, A5, A6 1,200 sheets 2,300 sheets 500 sheets 1,625 sheets Trays: (60 - 300 g/m²), Bypass: (5) Plain paper, Recycle paper, Speci Envelope, Gloss paper, Label pap	PS 2 3 8x3.85 line 16x15.4 line MH, M 68 spm 4 MB 60 MB, 4 MB 60 MB, A4, A5, A6, B4, B5, B6, Envelopes, Cu 2 - 300 g/m²), Duplex: (52 - 1 al paper, Color paper, Letter er, OHP Less:	seconds 3.6 Kbps ymm, 200x100 dpi e/mm, 400x400 dpi R, MMR, JBIG 81 spm , (320 pages) , (4,800 pages) relopes elopes sustom Size paper 169 g/m²) head, Cardstock, Preprinted paper,	Bond paper, Coated paper,
Circuit Transmission speed Modern speed: maximum Resolution: standard Resolution: option Compression method Scanning speed Memory: standard Memory: maximum PAPER HANDLING Recommended paper size Paper input: standard Paper input: standard Paper output: standard Paper output: maximum Paper weight Paper types ECOLOGY Power consumption: max. Power consumption operation: BMW Power consumption operation:	81 spm Standard paper tray(s):SRA3, A3, Optional paper tray(s):SRA3, A3, Bypass tray:SRA3, A3, A4, A5, A6, 1,200 sheets 2,300 sheets 500 sheets 1,625 sheets Trays: (60 - 300 g/m²), Bypass: (52, Plain paper, Recycle paper, Speci Envelope, Gloss paper, Label paper, Speci Envelope, Gloss paper, Gl	PS 2 3 8x3.85 line 16x15.4 line MH, M 68 spm 4 MB 60 MB, 60 MB, A4, A5, A6, B4, B5, B6, Envel A4, A5, A6, B4, B5, B6, Envel B5, B4, B5, B6, Envelopes, Cu 2 - 300 g/m²), Duplex: (52 - 1 all paper, Color paper, Letter er, OHP Less 415.9 W	seconds 3.6 Kbps ymm, 200x100 dpi e/mm, 400x400 dpi R, MMR, JBIG 81 spm (320 pages) (4,800 pages) velopes elopes sloopes sloom Size paper 169 g/m²) thead, Cardstock, Preprinted paper, tthan 1,700 W 451.5 W	Bond paper, Coated paper, 451.5 W
Circuit Fransmission speed Modem speed: maximum Resolution: standard Resolution: option Compression method Scanning speed Memory: standard Memory: standard Memory: maximum PAPER HANDLING Recommended paper size Paper input: standard Paper input: maximum Paper output: standard Paper output: maximum Paper weight Paper veget Cology Power consumption: max. Power consumption operation: Bower consumption operation: Solv Power consumption operation:	81 spm Standard paper tray(s):SRA3, A3, Optional paper tray(s):SRA3, A3, Bypass tray:SRA3, A3, A4, A5, A6, 1,200 sheets 2,300 sheets 500 sheets 1,625 sheets Trays: (60 - 300 g/m²), Bypass: (52, Plain paper, Recycle paper, Speci Envelope, Gloss paper, Label paper, Speci Envelope, Gloss paper, Gl	PS 2 3 8x3.85 line 16x15.4 line MH, M 68 spm 4 MB 60 MB, 4 MB 60 MB, A4, A5, A6, B4, B5, B6, Envel A4, A5, A6, B4, B5, B6, Envel A5, B6, Envelopes, Cu 2 - 300 g/m²), Duplex: (52 - 1 al paper, Color paper, Letter er, OHP Less 1 415.9 W 465.2 W	seconds 3.6 Kbps ymm, 200x100 dpi e/mm, 400x400 dpi R, MMR, JBIG 81 spm (320 pages) (4,800 pages) velopes elopes sloopes sloom Size paper 169 g/m²) thead, Cardstock, Preprinted paper, tthan 1,700 W 451.5 W	Bond paper, Coated paper, 451.5 W
FAX Circuit Transmission speed Modem speed: maximum Resolution: standard Resolution: option Compression method Scanning speed Memory: standard Memory: maximum PAPER HANDLING Recommended paper size Paper input: standard Paper input: standard Paper output: standard Paper output: standard Paper output: maximum Paper weight Paper votput: maximum Paper vorten: max. Power consumption: max. Power consumption operation: BW Power consumption operation: Full colour Power consumption: ready	81 spm Standard paper tray(s):SRA3, A3, Optional paper tray(s):SRA3, A3, Bypass tray:SRA3, A3, A4, A5, A6, 1,200 sheets 2,300 sheets 500 sheets 1,625 sheets Trays: (60 - 300 g/m²), Bypass: (52, Plain paper, Recycle paper, Speci Envelope, Gloss paper, Label paper, Speci Envelope, Gloss paper, Gl	PS 2 3 8x3.85 line 16x15.4 line MH, M 68 spm 4 MB 60 MB, 4 MB 60 MB, A4, A5, A6, B4, B5, B6, Envelopes, Cu 2 - 300 g/m²), Duplex: (52 - 1 al paper, Color paper, Letter er, OHP Less: 415.9 W 465.2 W	seconds 3.6 Kbps ymm, 200x100 dpi ymm, 200x100 dpi ymm, 400x400 dpi R, MMR, JBIG 81 spm (320 pages) (4,800 pages) (elopes yelopes selopes sistom Size paper 169 g/m²) head, Cardstock, Preprinted paper, than 1,700 W 451.5 W 497.1 W	Bond paper, Coated paper, 451.5 W
FAX Circuit Transmission speed Modem speed: maximum Resolution: standard Resolution: option Compression method Scanning speed Memory: standard Memory: maximum	81 spm Standard paper tray(s):SRA3, A3, Optional paper tray(s):SRA3, A3, Bypass tray:SRA3, A3, A4, A5, A6, 1,200 sheets 2,300 sheets 500 sheets 1,625 sheets Trays: (60 - 300 g/m²), Bypass: (52, Plain paper, Recycle paper, Speci Envelope, Gloss paper, Label paper, Speci Envelope, Gloss paper, Gl	PS 2 3 8x3.85 line 16x15.4 line MH, M 68 spm 4 MB 60 MB, 4 MB 60 MB, A4, A5, A6, B4, B5, B6, Envelopes, Cu 2 - 300 g/m²), Duplex: (52 - 1 al paper, Color paper, Letter er, OHP Less: 415.9 W 465.2 W	seconds 3.6 Kbps ymm, 200x100 dpi e/mm, 400x400 dpi R, MMR, JBIG 81 spm , (320 pages) , (4,800 pages) relopes elopes slopes sistom Size paper than 1,700 W 451.5 W 497.1 W	Bond paper, Coated paper, 451.5 W

RICOH IM C2000A/IM C2000/IM C2500A/IM C2500

Main specifications

IM C2000A IM C2000 IM C2500A IM C2500

OUTPUT TRAYS AND FINISHER OPTIONS

2x 550-sheet paper tray

Paper size: (SRA3, A3, A4, A5, A6, B4, B5, B6), Paper weight: (60-300 g/m²)

1x 550-sheet paper tray

Paper size: (SRA3, A3, A4, A5, A6, B4, B5, B6), Paper weight: (60-300 g/m²)

1,000-sheet Booklet finisher Paper size: (SRA3, A3, A4, A5, A6, B4, B5, B6), Paper weight: (52-300 g/m²), Stack capacity: (1,000 sheets), Staple capacity: (50

sheets), Staple paper size: (A3, A4, A5, A6, B4, B5), Staple paper weight: (52-105 g/m²), Staple positions: (Top, Bottom, 2 staples,

Booklet)

250-sheet Internal finisher Paper size: (A3, A4, A5, A6, B4, B5), Paper weight: (52-300 g/m²), Stack capacity: (250 sheets), Staple capacity: (5 sheets), Staple

paper size: (A3, A4, A5, B4, B5), Staple paper weight: (64-80 g/m²), Staple positions: (Top)

500-sheet Internal finisher Paper size: (A3, A4, A5, A6, B4, B5), Paper weight: (52-300 g/m²), Stack capacity: (500 sheets), Staple capacity: (50 sheets), Staple paper size: (A4, A5, B4, B5), Staple paper weight: (52-105 g/m²), Staple positions: (Top, Bottom, 2 staples)

Internal shift tray Tray capacity: (250 sheets), Paper size: (SRA3, A3, A4, A5, A6, B4, B5, B6), Paper weight: (52-300 g/m²)

One-bin tray

Tray capacity: (125 sheets), Paper size: (A3, A4, A5, B3, B4), Paper weight: (52-300 g/m²)

OTHER OPTIONS

Fax unit, G3 Interface, Fax connection unit, Fax memory unit, Cabinet, Caster table, VM card, Memory unit, Side Tray, Punch units, Camera direct print card, Genuine PostScript 3, IEEE 1284 I/F, IEEE 802.11 a/g/n I/F, Device server unit, File format converter, OCR unit, Enhanced security HDD, Data overwrite security unit, Small paper feeding unit, Page keeper, Imageable area extension unit, ADF handle, External keyboard bracket, Counter I/F unit, Key counter bracket, NFC card reader, Smart card reader built-in unit

CONSUMABLES

Toner: black 16,500 prints
Toner: cyan/magenta/yellow 10,500 prints

Consumable yield based on 2p/j 6% coverage on A4

*Airprint certification will be available in 2019.



















RICOH @Remote





